

*Hotcig*<sup>®</sup>

**R233**


User Manual

En

Please read the user manual carefully before using R233 and keep it properly. The accessory instructions is included in this manual

---

## Product details:

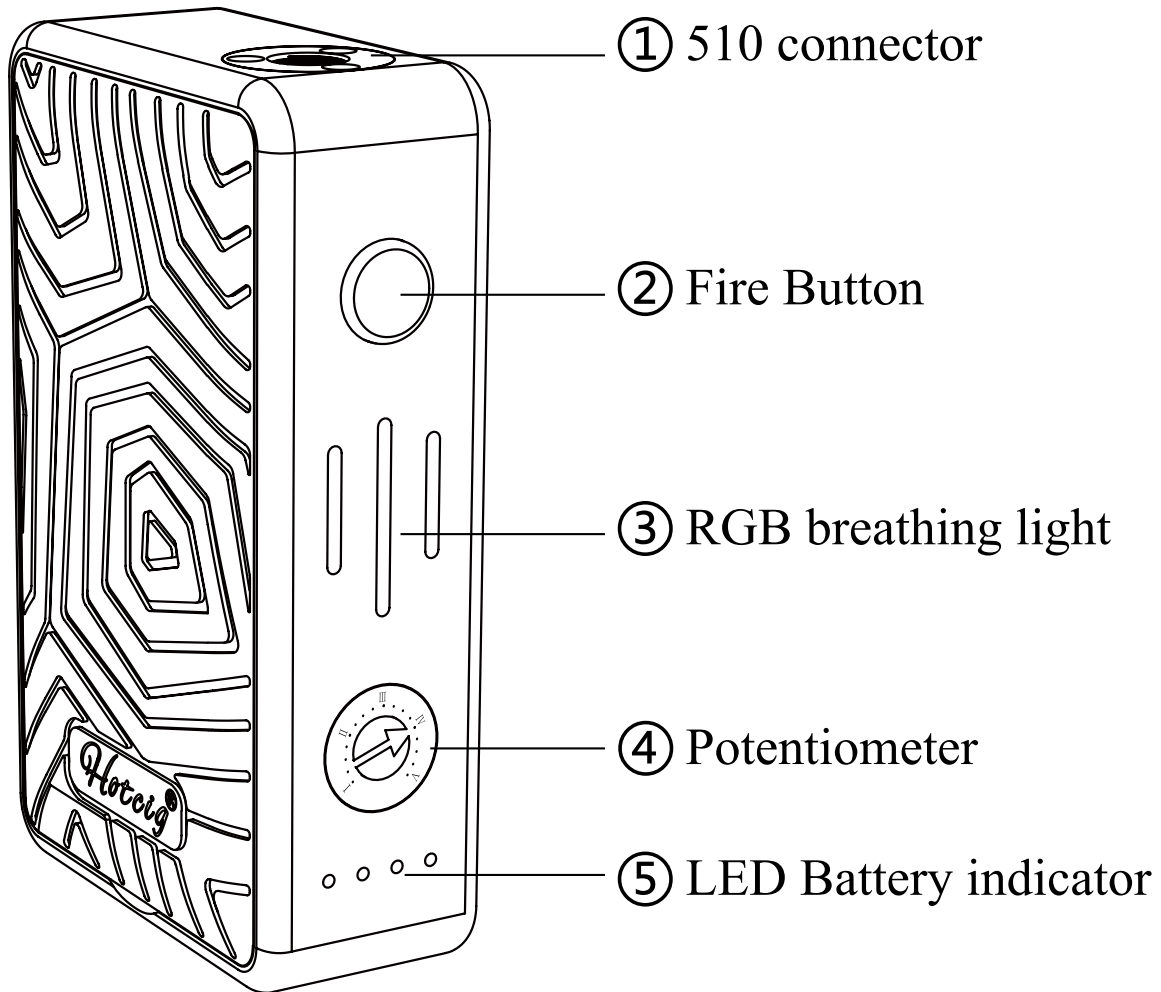

Thank you for choosing R233 adjustable box mod which designed & manufactured by Hotcig. In order to get the best vaping experience, be sure to read the instructions and precautions carefully. In addition, please keep this Instruction Manual for further reference if necessary.

Powered by dual 18650 batteries, R233 is R-Series product from Hotcig, heartbeat by HM chipset. Interchangeable magnetic panels. Wattage output ranges from: 10.0W to 233.0W.

# Operating Instructions:

## **1. On/ Off:**

Once equipped with battery, RGB light will flash 3 times while switch on, 5x click fire button, RGB light flashes 5 times and switch off. With the device off, 5x click fire button, RGB light flashes 3 times and turn on. On Standby mode, RGB light will display at breathing status, the light would be off after 30s without operation.

## **2. Wattage adjustment:**

The potentiometer control knob is for wattage adjustment. At gear 1, RGB light flashes in green(10W-60W), at gear 2, RGB light in blue(61W-120W), at gear 3, RGB light in red(121W-180W), at gear 4, RGB light in various color(181W-233W).

## **3. Alarm hints:**

- No atomizer(low/ high resistance):  
RGB light flashes 3 times in red
- Short circuit: RGB light flashes 5 times in red
- Check battery: RGB light flashes 4 times in red
- Overheat: RGB light flashes 6 times in red
- Low voltage: RGB light flashes 8 times in green

## **4. Power hints:**

100% power displayed at 4 indicators. 75% power displayed at 3 indicators. 50% power displayed at 2 indicators. 25%power displayed at 1 indicator. At low power, 1 indicator will flash 3 times.

## Specifications:

Instant fire speed of about 0.008S

	Minimum	Typical	Max
Input Voltage	6.4V	7.4V	8.5V
Input Current	0.5A	-	40A
Output Power	10W	-	233W
Output Voltage	1.0V	-	7.5V
Output Current	-	-	52A
Atomizer Resistance	0.1Ω	0.5Ω	3.0Ω
Static power consumption	80UA	120UA	180UA
Efficiency	95%		
Energy/Power indicator	LED/RGB breathing light		
Battery Rate	Must be powered by battery pack higher than 15C		

## Safety Notice:

R233 adjustable box mod doesn't come with battery, please choose decent battery to run this device. Hotcig will take no responsibility if device got damaged by ungraded battery.

## Warning :

1. Please choose the e-liquid with or without nicotine at your own needs. This product only aims at people of the legal smoking age (over 18 years old). The product is not allowed to be sold to non-smokers, such as children, pregnant women, the breast-feeding, and people with heart disease, high blood pressure, diabetes. Taking drugs to treat depression or asthma, nicotine allergy is also not appropriate to use the product.

2. Please make sure that the product isn't suitable for tobacco or dry herb plants.

3. This device is not approved by FDA, not suggest to treat, relieve or prevent any disease.

4. Keep out of the reach of children and pets.

5. This product contains tiny parts, please keep it well as ingestion of small parts may cause a choking hazard.

6. The product may be damaged due to falling or improper operation, please do not throw and be careful to place, otherwise cover and internal parts would get broken.

7. Do not try to repair the product yourself and stop using the damaged product to prevent personal injury.

8. We strongly suggest charge the product timely if

battery power lower than 10%.

9. Keep away from high temperature environment in use or storage.

10. Please follow the local laws and regulations regarding the use of electronic cigarettes when using this product. Please do not vape if you are in any non smoking or potentially dangerous area.

11. This product adopts a chip with certain water proof function, but it does not mean that this product is water proof, please use with caution. If any liquid penetrate into the product from the slots or holes, please stop using it immediately and contact with your local authorized dealer of Hotcig.

12. Shenzhen Hot Technology Co., Ltd. is not responsible for the use of Non-Hotcig product (such as poor quality atomizers, batteries, etc) which resulting in product failure or damage, charger explosion, fire or other losses.

13. Don't throw or drop or use R233 in wrong way, or the cover or internal parts may get damaged.

## Caution:

Please use the device strictly according to the instruction listed in the manual, otherwise Hotcig would not undertake any responsibility.

## Warranty policy:

Hotcig provides a 90 days after-sales service warranty to all of our authorized vendors. This warranty does not apply if the product was purchased from unauthorized vendors. For more information about the product, please consult our authorized dealers or visit:

**[www.hotcigtech.com](http://www.hotcigtech.com)**

SHENZHEN HOT TECHNOLOGY CO.,LTD

[www.hotcigtech.com](http://www.hotcigtech.com)

