


FIFOTRACK 3G VEHICLE GPS TRACKER



Model: A500

Version: V1.1

www.fifotrack.com



Copyright and Disclaimer

- ④ All copyrights belong to Shenzhen fifotrack Solution Co., Ltd. You are not allowed to revise, copy or spread this file in any form without consent of fifotrack.
- ④ **Fi** is trademark of fifotrack, protected by law.
- ④ Please read this user guide carefully before installation to avoid any possible personal injury or property loss.

Revision History

| Version | Author | Revision Date | Description of change |
|---------|---------|---------------|-----------------------|
| V1.1 | Cici Wu | Oct 15, 2016 | Initial revision |



Related Files

| Version | File | Remarks |
|--|---|--|
| V1.1 | <fifotrack A500 GPRS Protocol and Command List> | GPRS protocol between terminal and server, command details of GPRS/SMS/COM |
| V1.1 | <fifotrack Parameter Tool User Guide> | PC software tool for parameters configuration |
| V1.1 | <USB Cable Driver Installation Guide> | How to install USB cable driver |
| V1.1 | <Firmware Upgrade Guide> | How to upgrade firmware |
| V1.2 | <fifotrack RFID Reader User Guide> | How to use RFID Reader |
| V1.1 | <fifotrack iButton User Guide> | How to use iButton |
| V1.1 | <fifotrack Digital Temperature Sensor User Guide> | How to use digital temperature sensor |
| V1.1 | <fifotrack Camera User Guide> | How to use camera |
| V1.1 | <fifotrack Ultrasonic Fuel Sensor User Guide> | How to use ultrasonic fuel sensor |
| V1.1 | <fifotrack Fingerprint User Guide> | How to use fingerprint scanner |
| Download link: http://www.fifotrack.com/Support/Userguide/ | | |

Related Software

| Version | Software | Remarks |
|--|-----------------------------------|------------------------------------|
| V1.0 | <Parameter Tool> | Parameter configuration tool on PC |
| V1.11.0 | <PL2303_Prolific_DriverInstaller> | Driver for USB cable |
| V1.0 | < Firmware Upgrade Suite> | Tool for firmware upgrade |
| Download link: http://www.fifotrack.com/Support/Userguide/ | | |



Contents

| | |
|---|-----------|
| 1 Product Overview..... | 5 |
| 2 Product Functions..... | 5 |
| 2.1 Tracking Functions..... | 5 |
| 2.2 Alarms..... | 5 |
| 2.3 Other Functions..... | 6 |
| 3 Product and Accessories | 6 |
| 3.1 Standard Packing Box | 6 |
| 3.2 Optional Accessories..... | 7 |
| 4 Product Appearance | 7 |
| 5 PCBA Overview and Hardware Design..... | 8 |
| 5.1 Hardware Design Highlight | 8 |
| 6 LED Light | 9 |
| 7 Specification..... | 10 |
| 7.1 Basic Specification | 10 |
| 7.2 Working Frequency..... | 10 |
| 8 First Use | 11 |
| 8.1 Charging..... | 11 |
| 8.2 Installing the SIM Card..... | 11 |
| 8.3 Installing GSM/GPS Antenna | 12 |
| 8.4 Tracking by Calling | 12 |
| 8.5 SMS Reply Content Example..... | 13 |
| 8.6 Tracking by SMS Command - C01 | 14 |
| 8.7 Configuration by PC..... | 14 |
| 8.8 Platform Tracking..... | 15 |
| 9 Device Installation..... | 15 |
| 9.1 I/O Installation..... | 15 |
| 9.2 Power/GND Cable..... | 17 |
| 9.3 Positive/Negative Digital Input (IN1/IN2/IN3/IN4) | 18 |
| 9.4 Analog Input (AD) | 18 |
| 9.5 Output control (OUT1/OUT2) | 19 |



1 Product Overview

A500 is an advanced 3G model which is suitable for fleet management, public transportation management, school bus management, taxi operation management, vehicle insurance company management, rent car management and private car antitheft, etc.. A500 supports RS232 and 1-wire protocol, this enables A500 to have powerful functions such as photographing, driver identification and management, impulse detection and temperature monitoring.

Besides the advanced functions, A500 has full functions to cover the normal demands of vehicle tracking. Not only fuel monitoring, harsh acceleration/braking alarm, driving behavior analysis, but also has custom digital input, jamming detection, two-way calling and OTA function. A500 uses own FIFOTRACK GPRS PROTOCOL which is simple and practical; this enables the customers to integrate on their own platform efficiently.

2 Product Functions

2.1 Tracking Functions

- GPS+GSM Base Station Dual Tracking
- Real Time Tracking
- Time Interval Tracking
- Distance Tracking
- Direction Change Tracking
- Mobile Phone Tracking

2.2 Alarms

- SOS Alarm
- GPS Antenna Cut Alarm
- External Power Cut Alarm
- Engine/Door Status Alarm
- Maintenance remind
- GEO-Fence Alarm
- Speeding Alarm
- Idling Alarm
- Fatigue Driving Alarm

- Harsh Acceleration Alarm
- Harsh Braking Alarm
- Parking Overtime Alarm
- GPS Jamming Alarm
- GSM Jamming Alarm
- Internal Battery Low Alarm
- External Battery Low Alarm

2.3 Other Functions

- Stop Car Remotely
- 8 MB Flash Memory
- Custom Digital Input
- OTA
- Uploading Mode Settings for ACC ON/ACC OFF
- Roaming Time Interval Setting
- Mileage And Running Time Settings
- Tacking picture via camera (Optional)
- Driver identification and management via RFID Reader, i-Button, fingerprint scanner (Optional)
- Fuel sensor (Optional)
- Temperature sensor (Optional)
- Voice monitoring (Optional)
- Two-way Calling(Optional)
- Impulse detection (Default speedometer detection)

3 Product and Accessories

3.1 Standard Packing Box



Main Unit



Wire



GPS Antenna





GSM Antenna

3.2 Optional Accessories




4 Product Appearance

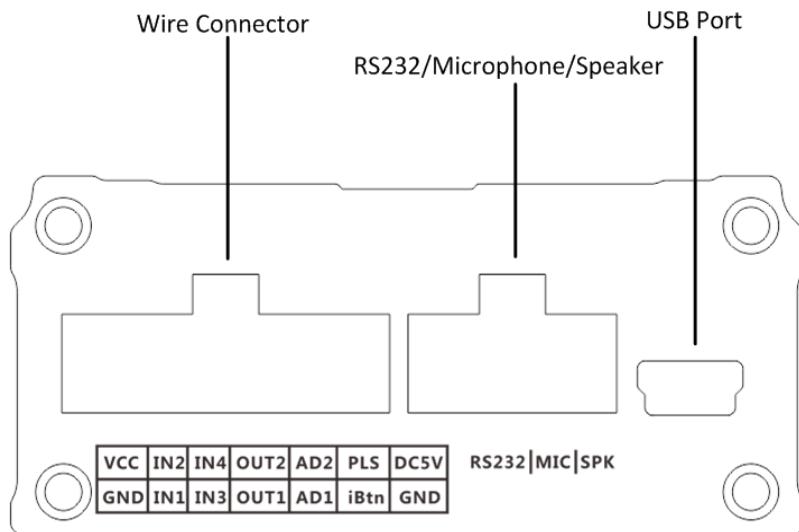

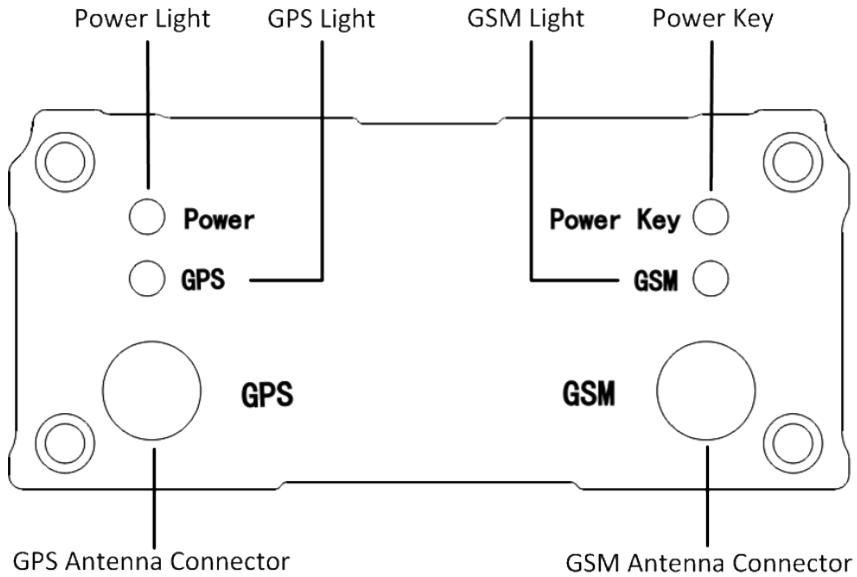

5 PCBA Overview and Hardware Design

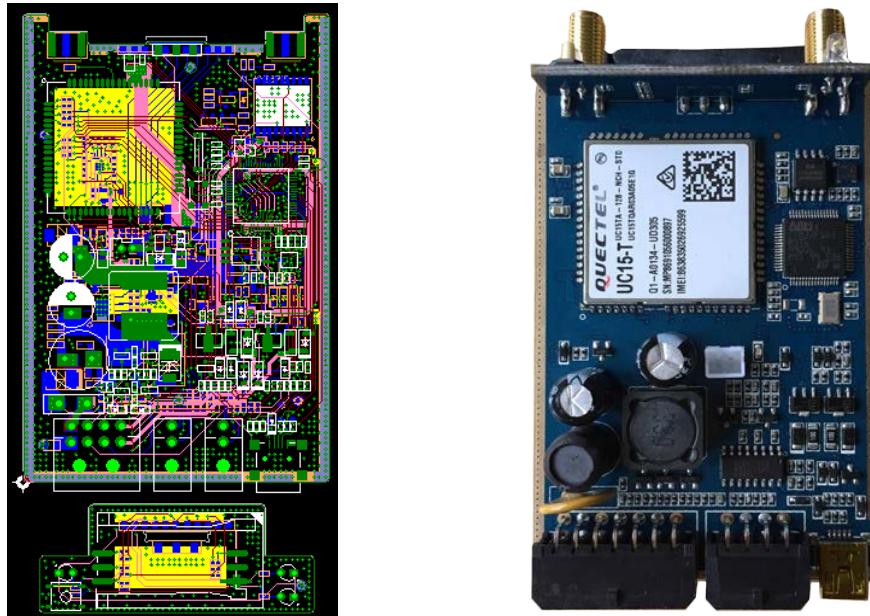

5.1 Hardware Design Highlight

Protection for sudden-change of auto power supply: When the vehicle starts or is running, the power voltage will have a wave of change. Our product supports voltage 11V-36V. When the external power supply is below 10.5V, with low voltage detection, it will be automatically cut. When external power supply is over 36V or has high voltage peak, the product will trigger high-voltage protection through

clamping, anti-pulse, and high voltage detection. This ensures the product to operate normally under high voltage.

Auto power transient pulse: When the vehicle starts or is running, it will generate high-voltage transient pulse with a range of hundreds of volts. If the product's circuit is not well designed, it is very easy to get damaged, and can't be used. Through multistage transient pulse protection and anti high-voltage surge protection, the product's power circuit is well protected, and it can operate stably.

Electromagnetic immunity: When the vehicle starts, the clock, RF, display screen and USB are very easy to be interfered by electric spark, which causes the product to operate unstably. Through PCB layout and ground wire handling, the product can work stably under interfered environment.

Anti static: The vehicle product's working condition is complex. It is very easy to be influenced by static, which causes damage to the product's peripheral interfaces. Through ESD protection on circuit and ground wire handling, the static in the range of 8KV-15KV won't cause damage to product. This ensures the product's stability under complex working condition.

6 LED Light

| GPS Light (Green) | |
|---------------------------|--------------------------|
| Off | Power off or sleep |
| Flash 0.1s on and 3S off | GPS valid |
| Flash every 0.1s | GPS antenna cut |
| Flash 2s on and 2s off | No GPS signal |
| On | GPS module power problem |
| GSM Light (Orange) | |
| Off | Power off or sleep |
| Flash 0.1s on and 3s off | GSM available |
| Flash every 0.1s | Device is initialing |
| Flash 2s on and 2s off | No GSM |
| External Power Light(Red) | |
| Off | External power cut |
| Flash every 0.1s | External power low |
| On | External power normal |

7 Specification

7.1 Basic Specification

| Item | Specification |
|-----------------------|--|
| Dimension | 90*60*27mm |
| Weight | 145g |
| GSM Module | Quectel UC15 |
| GSM Frequency | Refer to chapter 7.2 |
| GPS Module | U-blox7Q |
| Input Voltage | DC 11~36V/1.5A |
| Internal Battery | 600mAh/3.7V |
| Power Consumption | 30-65mA standby current |
| Internal Battery Life | 100 hours in sleep mode, and 10 hours in normal working mode. |
| Operating Temperature | -20°C~70°C |
| Humidity | 5%~95% |
| LED Light | 3LED lights indicating GPS/GSM/External power status |
| Button/ Switch | 1SOS Button, 1 power switch |
| Flash Memory | 8MB(GPSR data 20400 units, SMS data 300 units) |
| Sensor | 3D Accelerator sensor |
| GPS Sensitivity | -161dBm |
| GPS Start Speed | Cold start 35s Hot start 1s |
| Position Accuracy | 10m |
| I/O Port | 4 digital input - 1 negative input, 1 positive input, 2 custom input (Default 1 positive input, 1 negative input) 2 analog input, voltage range: AD1 ~ 0~6V AD2 ~ 0~12V 2 output 1 RS232 port (camera/RFID reader/ultrasonic fuel sensor/fingerprint) 1-wire protocol (temperature sensor/i-Button) 1 Impulse detection (Default speedometer detection) 1 USB port |

7.2 Working Frequency

| | UMTS Frequency/MHz | | | | GSM Frequency/MHz | | | |
|--------|--------------------|-----|------|------|-------------------|-----|------|------|
| | 850 | 900 | 1900 | 2100 | 850 | 900 | 1800 | 1900 |
| Type-A | ■ | | ■ | | ■ | ■ | ■ | ■ |
| Type-E | | ■ | | ■ | | ■ | ■ | |
| Type-T | ■ | | | ■ | ■ | ■ | ■ | ■ |

8 First Use

8.1 Charging

First time use A500, please connect positive wire(+ Red) and ground wire(-black) to 12V or 24V external power supply, charging device for at least 2 hours, 3 hours is suggested. Before installation, ensure all of the parameters setting and test are finished.

8.2 Installing the SIM Card

- Device supports 2G and 3G network.
- Ensure the SIM card has enough balance.
- Ensure PIN code has been closed.
- Authorization SOS numbers can't work well if SIM card doesn't have caller ID service. E.g.: device can't reply SMS to authorization SOS number because SIM card can't identify incoming call.
- SIM card should have GPRS function for platform tracking.
- Turn off device before SIM card installation.



Screw off and open the front cover



Insert SIM card into SIM card slot

Make sure the chip is facing to PCB. Pay attention to the cutaway angle direction of SIM card.



Close front cover and lock the screw

8.3 Installing GSM/GPS Antenna

Connect GSM Antenna to SMA connector with “GSM” silk. The GSM antenna’s signal is omnidirectional, you can hide it anywhere that is far from the power supply.


Connect GPS Antenna to SMA connector with “GPS” silk. GPS antenna should face to the sky for stronger GPS signal reception, and the silvery silk side should be downward. Fix GPS antenna with double sided tapes for stable signal reception.



Don’t install the GPS antenna where shielded by metal. For example, inside a metal can.

8.4 Tracking by Calling

Call the SIM card number inside A500, you will get a SMS reply with Google map link. Click it for specific map location.

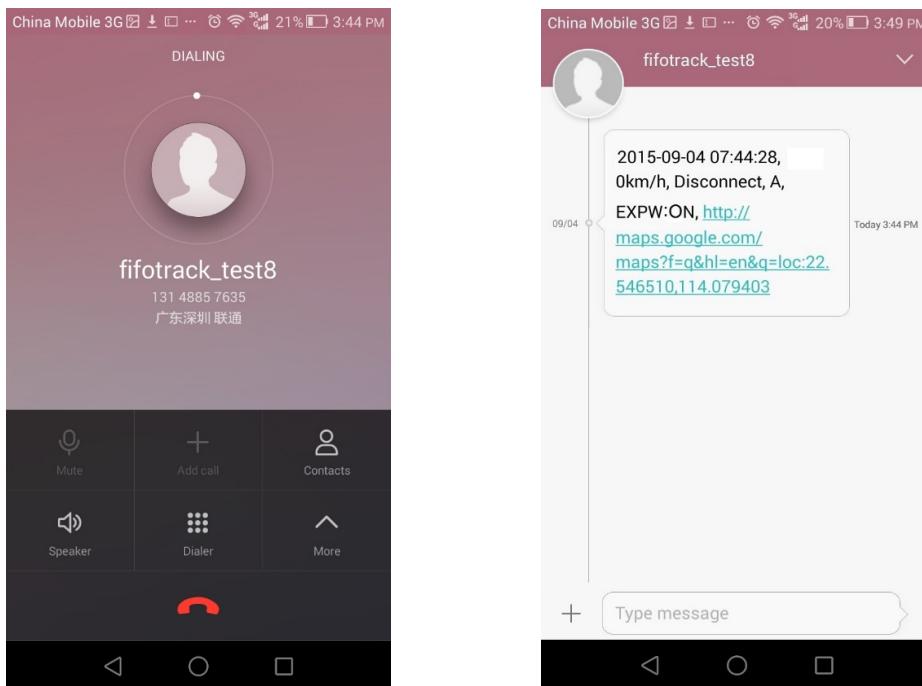



8.5 SMS Reply Content Example

2015-09-04 07:44:28, 0km/h, Disconnect, A, EXPW:ON, http://maps.google.com/maps
 ?f=q&hl=en&q=loc:22.546510,114.079403

SMS Reply Format:

| Field | Detail | Remarks |
|--|--|---|
| 2015-09-04 07:44:28 | Date and time, format YYMMDD hh:mm:ss | Date and time |
| 0km/h | Speed is 0km/h | Speed |
| Disconnect | GPRS disconnect | GPRS connection status, "Disconnect" or "connect". |
| A | GPS valid | GPS Status, "A" means GPS valid, "V" means GPS invalid. |
| EXPW:ON | External power on | External power status. "ON" means external power normal, "OFF" means external power cut. |
| http://maps.google.com/maps ?f=q&hl=en&q=loc:2 2.546510,114.07940 3 | Google map link, latitude in the front of longitude after "Loc". Unit degree Latitude=22.546510° Longitude=114.079403° | Google map link with latitude and longitude, which can be opened directly on smart phone. |



8.6 Tracking by SMS Command - C01

SMS Command: 000000,C01

SMS Reply: Current location




Note: Default SMS password is “000000”, set new SMS password with B10 command.


Please refer to <FIFOTRACK COMMAND LIST>for more details.

8.7 Configuration by PC

fifotrack company provide <FIFOTRACK PARAMETER TOOL> for configuration. Please download USB cable driver and install it before using parameter tool. Refer to <USB CABLE DRIVER INSTALLATION GUIDE> if need.



Connect A500 to PC with USB cable. Run “fifotrack Parameter Tool” software which will identify port automatically and read all of the current parameters.

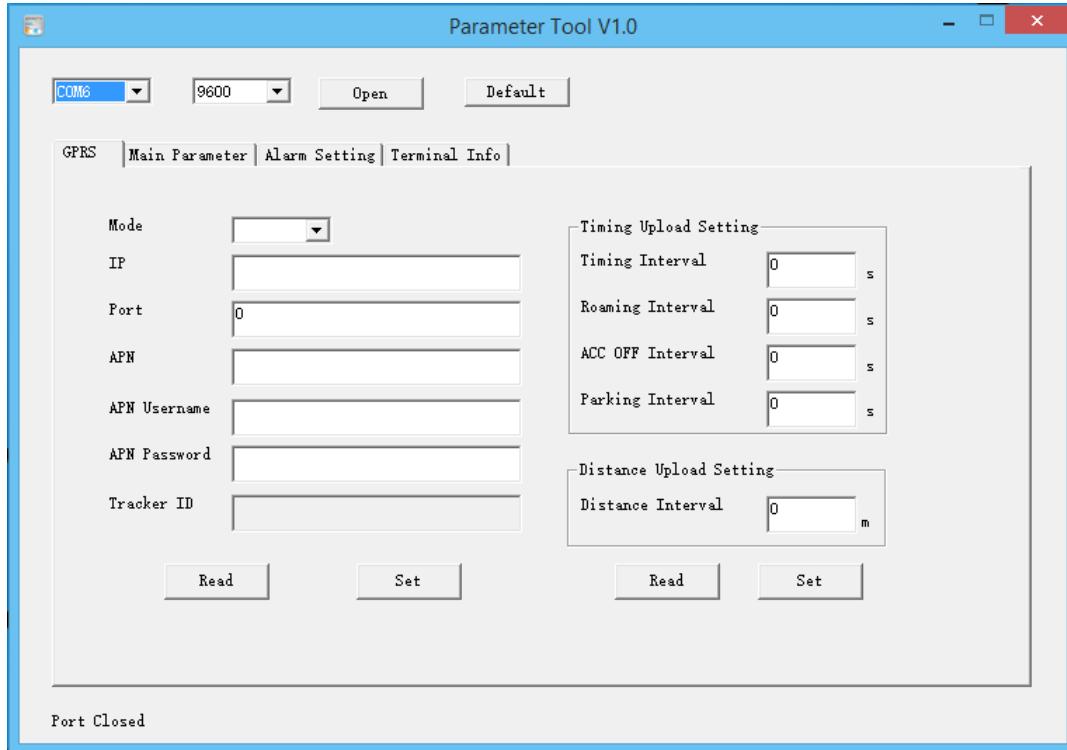

Please read <FIFOTRACK PARAMETER TOOL USER GUIDE> for more details.

8.8 Platform Tracking

You can use SMS commands B00, B01, B02, B03 to set server IP, port, APN and GPRS uploading interval.

You can also set those parameters via parameter tool software on PC.

9 Device Installation

9.1 I/O Installation

I/O wire has 14 pins, including power, digital positive and negative input, output, analog input, impulse detection and 1-wire protocol cables.



| | | | | | | |
|-----|-----|-----|------|-----|------|------|
| VCC | IN2 | IN4 | OUT2 | AD2 | PLS | DC5V |
| GND | IN1 | IN3 | OUT1 | AD1 | iBtn | GND |

| I/O | Color | Function |
|------|--------|---|
| VCC | Red | Positive power, connect to positive of vehicle battery, input voltage range 11-36V |
| GND | Black | GND, connect to negative of vehicle battery or the vehicle's iron part. |
| IN2 | White | Digital input2, positive input, default connect to ACC for status detection. |
| IN1 | White | Digital input1, negative input (default SOS button) |
| IN4 | White | Digital input4, custom input, default negative. |
| IN3 | White | Digital input3, custom input, default positive. |
| OUT2 | Yellow | Output2 Output active: low level (0V) Output inactive: open drain (OD) Max open-drain (inactive) voltage: 45V Max current for output low voltage (valid): 500mA |
| OUT1 | Yellow | Output1 Output active: low level (0V) Output inactive: open drain (OD) Max open-drain (inactive) voltage: 45V Max current for output low voltage (valid): 500mA |
| AD2 | Blue | 12 bits analog input, supports voltage range 0-12V. Connect to external sensor, e.g., fuel sensor. |
| AD1 | Blue | 12 bits analog input, supports voltage range 0-6V. Connect to external sensor, e.g., fuel sensor. |


| | | |
|------|--------|--|
| PLS | Brown | Impulse detection, 0~100kHz |
| GND | Black | 1-wire protocol port for i-Button and temperature sensor |
| DC5V | Orange | |
| iBtn | Purple | |

RS232|MIC|SPK Port


| | | | |
|------|--------------|------|------|
| DC5V | MCU_RS232_TX | MIC+ | SPK+ |
| GND | MCU_RS232_RX | MIC- | SPK- |

| I/O | Function |
|--------------|--|
| DC5V | RS232 port for camera/RFID Reader/Ultrasonic fuel sensor/fingerprint scanner or other RS232 interface devices. |
| GND | |
| MCU_RS232_TX | |
| MCU_RS232_RX | |
| MIC+ | Microphone port |
| MIC- | |
| SPK+ | Speaker port |
| SPK- | |

9.2 Power/GND Cable

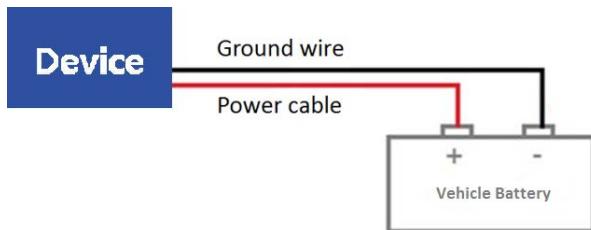

9.3 Positive/Negative Digital Input (IN1/IN2/IN3/IN4)

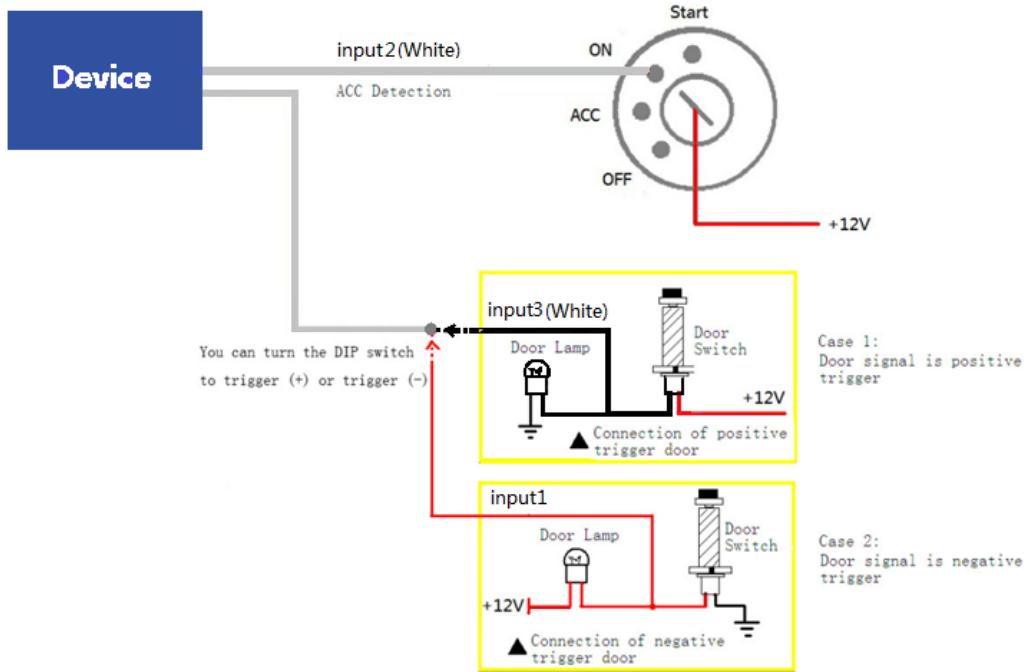

9.4 Analog Input (AD)

A500 supports 2 AD input, whose voltage range:

AD1: 0~6V

AD2: 0~12V


Calculation formula:

$$\text{AD1 Voltage} = (\text{AD1}) * 3300 * 2 / 4096$$

$$\text{AD2 Voltage} = (\text{AD2}) * 3300 * 62 / (4096 * 15)$$

Note: *Original AD value is in hexadecimal. Convert it to decimal first, and then use the formula.*

9.5 Output control (OUT1/OUT2)

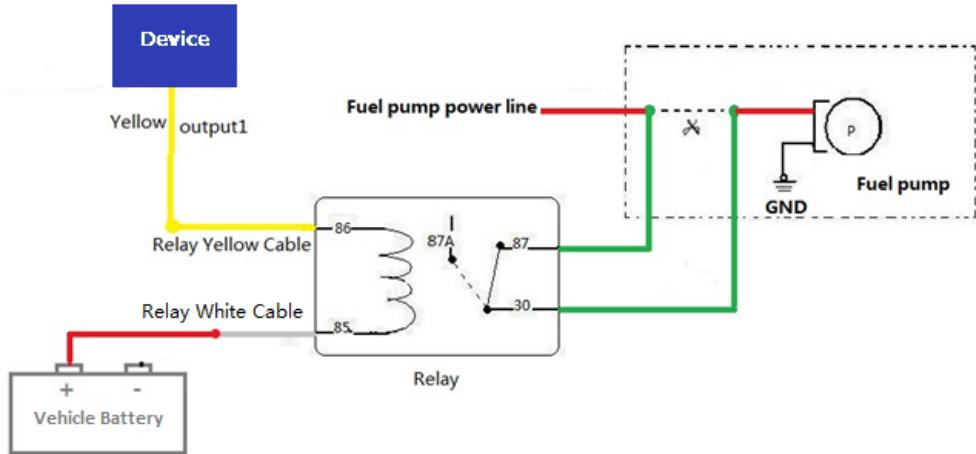

Please e-mail us at info@fifotrack.com if any question or feedback.