



Anker Innovations Limited. All rights reserved. **Eufy** and the **Eufy logo** are trademarks of Anker Innovations Limited, registered in the United States and other countries. All other trademarks are the property of their respective owners.

51005001157 V01





## User Manual

eufy Security SpaceView  
Baby Monitor




## Tabel of Content

What's in the Box	01
Feature Introduction	02
Setting Up the Camera and Monitor	03
Replacing the Camera lens	11
Safety	12
Customer service	15



## What's in the Box



Baby Monitor  
(T8300-C)



Baby Camera  
(T8300-M)



Wall Mount



Monitor Micro-USB  
Power Cable (1.5 m)



Camera Micro-USB  
Power Cable (3 m)



Camera Adapter  
(5V 2A)



Monitor Adapter  
(5V 2A)



Mounting  
Screws



Wide-Angle Lens



User manual





Power adapter varies by region.

01

## Feature Introduction

### Monitor Features:




- 1 Volume controls
- 2 Screen
- 3 Power button
- 4 Menu button
- 5 Navigation buttons
- 6 Return to previous level of menu / Talk button
- 7 Monitor Antenna
- 8 microSD card slot
- 9 Support stand
- 10 Micro USB charging port
- 11 LED indicator
- 12 Microphone
- 13 Speaker




Press and hold the Talk button to speak to the camera. When Menu is opened, press Talk button once to return to previous level of menu. Press Power button to switch on / off the monitor screen. Press and hold the Power button for 2 seconds to switch on / off the monitor.

02

 microSD memory card can only be used for firmware upgrade, it cannot be used to store video recordings.

### Camera Features:

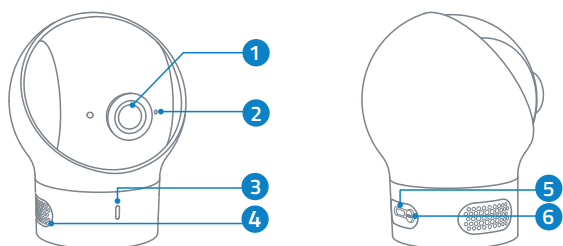


- 1 Standard camera lens
- 2 Microphone
- 3 Power LED Status indicator
- 4 Speaker
- 5 Micro USB port
- 6 Pairing button

03

## Setting Up the Camera and Monitor


### Monitor Installation

**Fully charge the monitor before use. To charge:** Connect the baby monitor to the monitor adapter with the Micro USB cable, and then connect the adapter to a power outlet. Connect the other end of the baby monitor's Micro USB power cable to the Micro USB port in the monitor to charge it. Press and hold the power button for 2 seconds to turn the baby monitor on.

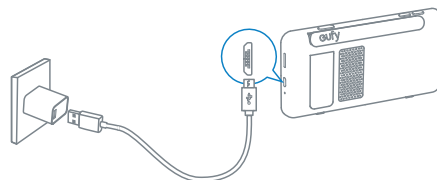

### Camera Installation

Connect the baby camera's Micro USB power cable to the camera adapter (5V 2A), and then connect the adapter to a power outlet. Finally, connect the other end of the baby camera's micro USB power cable to the micro USB port in the camera.




04

## Adding a new Camera to the Monitor



The baby camera and baby monitor are paired out of the box. Refer to the following steps when adding extra baby cameras or after resetting a baby camera.

1. Enter menu settings, go to **Camera** -> **Add Camera**, then follow onscreen instructions to start the pairing.
2. Press and hold the pairing button on the rear of the camera for 1 second until a notification prompt is heard.

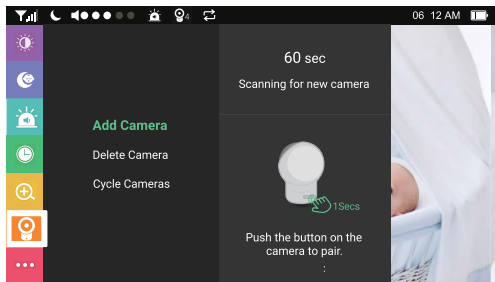


When volume is set to high, monitor will emit a loud noise if placed close to the camera. This is normal phenomenon and can be resolved when camera is moved away from the monitor.


05

## Camera Placement (on the Wall Mount)

1. Use the monitor to test the viewing angle from your desired mounting spot.
2. Mark the screw holes with a pencil.
3. Drill 1/5" holes into the wall and then insert the anchors into the holes.
4. Insert the screws through the mounting holes of the wall mount and screw into the anchors.




5. Place the camera on the wall mount.



06

Press and hold the power button to power on the monitor.  
Press the menu button to open Menu Settings.

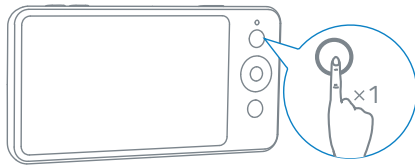

### Monitor Menu Settings

Menu Options	Description	Available Options
<b>Brightness</b>	Set the brightness of the screen.	Use the navigation buttons to adjust the brightness level
<b>Sleep Mode</b>	Select to turn off the screen after 1 min, 3 min, or 5 min.	Off / 1 min / 3 min / 5 min
<b>Sound Alert</b>	Sound Level Note: You can set the baby monitor to alert you when a specific noise level is detected.	Off / Level 1 / Level 2 / Level 3 / Level 4 / Level 5 Note: Level 1 has the best sensitivity.
	Alert Duration	10 Secs / 20 Secs / 30 Secs / 60 Secs

07


<b>Time</b>	Set the time on the monitor.	
<b>Zoom</b>	Set the zoom level.	Off / 1.5x / 2x
<b>Camera</b>	Add Camera Note: You can add up to 4 cameras per baby monitor.	
	Delete Camera	Delete / Cancel
	Cycle Cameras Note: Cycles through the list of connected baby cameras according to preset intervals.	Off / 5 Secs / 10 Secs / 15 Secs / 30 Secs
<b>Night Vision Mode</b>	When enabled, the camera will change the screen color accordingly to the light conditions in the room. When disabled, the camera will stick to daylight screen color and will not change when the surrounding environment is getting dark.	On / Off
<b>Anti-Screen Flicker</b>	Changes the refresh rate of the screen to prevent flickering.	Mode A / Mode B

08

Language	Sets the on-screen display menu language.	English / French / German / Spanish
Default Settings	Resets all options to their default setting.	Yes / No
About	Displays the current software version.	Software version
Connect with Us	Contact details.	Cancel / OK



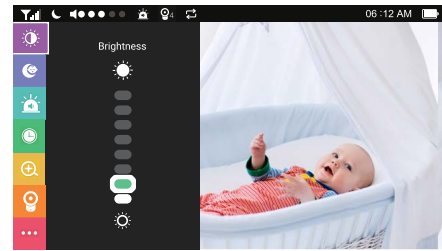

The interval duration between each sound alert is 30 seconds. It will not alert during this interval even if there is alert trigger condition.



### On-screen Menu Icons

Icon	Icon Description
	Wireless signal strength
	Night Vision Mode is enabled
	Shows the camera that is currently presenting on the baby monitor screen Note: This icon will not appear on the screen when there is only one camera connected to monitor.
	Cycle Cameras enabled
	Sound Alert enabled
	Sound level of the room the camera is in
	Current time
	Current battery level of the baby monitor

## Replacing the Camera lens


Lens type	Usage	Lens
Standard camera lens (default lens)	<p>This lens is recommended for general viewing; infants are clearly seen within a 2~3m range.</p> <p>The lens angle of view for standard camera lens is 62°.</p>	
Wide-angle lens	<p>This lens provides a wide-angle view of the room. The lens angle of view for wide-angle lens is 110°.</p>	

The standard camera lens is not removable. When you want to use the wide-angle lens, simply place it over the standard camera lens and fasten.

## Safety

### Warning

Strangulation Hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 1m (3ft) away). Never use extension cords with AC Adapters. Only use the AC Adapters provided.

 This product complies with the radio interference requirements of the European Community.

### Declaration of Conformity

Hereby, Anker Innovations Limited declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. For the declaration of conformity, visit the Web site <https://www.eufylife.com/>.

This product can be used across EU member states.

Due to the used enclosure material, the product shall only be connected to a USB Interface of version 2.0 or higher. The connection to so called power USB is prohibited.

A statement regarding the AC/DC adapter as disconnect device is missing in the user manual.

The statement shall require a socket outlet that is installed near equipment and that shall be easily accessible.

The adapter shall be installed near the equipment and shall be easily accessible.

Do not use the Device in the environment at too high or too low temperature, never expose the Device under strong sunshine or too wet environment. The suitable temperature for the product and accessories is -20°C-60°C.

When charging, please place the device in an environment that has a normal room temperature and good ventilation.

It is recommended to charge the device in an environment with a temperature that ranges from -10°C-40°C.

Please ensure to use only the charger offered by the manufacturer. Using unauthorized charger may cause danger and violate the authorization of the projector and the guarantee article.

The charger output voltage/current is 5Vdc/2A. The plug considered as



disconnect device of adapter.

If you use a third-party charger, the recommended output voltage/current of the adaptor is 5Vdc/2A, and the adapter shall be CE approval type.

CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS  
RF exposure information: The Maximum Permissible Exposure (MPE) level has been calculated based on a distance of  $d=20$  cm between the device and the human body. To maintain compliance with RF exposure requirement, use product that maintain a 20cm distance between the device and human body.  
Operating Frequency Range: 2410-2477MHz

CE SAR:

The SAR limit of Europe is 2.0 W/kg. Device types T8300-M has also been tested against this SAR limit. The highest SAR value reported under this standard. This device was tested for typical hand held operations with the back of the device kept 0mm from the Limb.

The following importer is the responsible party (contact for EU matters only)

Importer: Anker Technology (UK) Ltd

Importer Address: Suite B, Fairgate House, 205 Kings Road, Tyseley, Birmingham, United Kingdom B11 2AA



This product is designed and manufactured with high quality materials and components, which can be recycled and reused.



This symbol means the product must not be discarded as household

waste, and should be delivered to an appropriate collection facility for recycling. Proper disposal and recycling helps protect natural resources, human health and the environment. For more information on disposal and recycling of this product, contact your local municipality, disposal service, or the shop where you bought this product.

#### FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

13

**Warning:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

(1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and receiver. (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. (4) Consult the dealer or an experienced radio/TV technician for help.

#### FCC Radio Frequency Exposure Statement

The T8300-C device has been evaluated to meet general RF exposure requirements. The T8300-C can be used in fixed exposure condition. The min separation distance is 20cm.

This T8300-M was tested for typical body worn operations with the back of the handset kept 0 mm from the body.

RF Exposure Information(SAR)

The Extremity SAR limit of FCC for Hand held is 4.0W/kg.

Device is recommended to use in hand held only and SAR when hand held is 1.804W/kg

Worn on body will have unexpected RF exposure RISK.

The following importer is the responsible party Company Name:

POWER MOBILE LIFE, LLC

Address: 400 108th Ave NE Ste 400, Bellevue, WA 98004-5541

Telephone: 1-206-383-8247

14

## Customer service

- **Warranty**

12-month limited warranty

- **Call Us**

United States +1 (800) 988 7973 Mon-Fri 9AM-5PM (PT)

United Kingdom +44 (0) 1604 936 200 Mon-Fri 6AM-11AM (GMT)

Germany +49 (0) 69 9579 7960 Mon-Fri 6:00-11:00

- **Email Us**

Customer Support: [support@eufylife.com](mailto:support@eufylife.com)



@EufyOfficial



@EufyOfficial



eufyofficial